


Easy on-PC

Modern PC-based spirometer offering maximum functionality and value

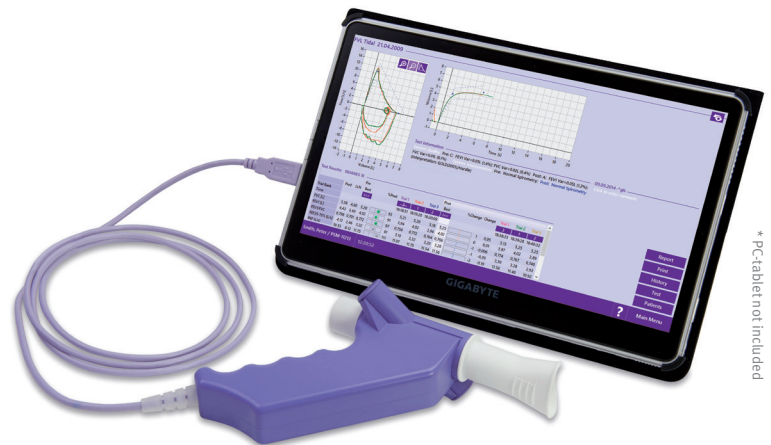

* PC-tablet not included

Spirometry (FVC, FVL, SVC, MVV, Provocation)

The proven ultrasound technology
n d d TrueFlow

**no calibration, no warm-up
time, no moving parts**

Real time curves and pediatric incentives

Intuitive PC-based solution

Automated user guidance throughout maneuvers based on current ATS/ERS standards

Reproducible results ensure comparability in multicenter studies

Immediate test quality feedback in accordance with ATS/ERS criteria

Export of pdf files and raw data

Flexible HL7 and XML interface for easy EMR integration

Absolute hygienic solution with Spirette consumable eliminates the risk of cross-contamination

Customizable reports

Powerful data-management

Standards & Recommendations

**Quality, Medical
Devices & Electrical**

EN ISO 9001 , EN ISO 13485 , EN ISO 14971 , EN 62366 , EN 62304 , EN ISO 26782 , EN ISO 23747 , IEC 60601-1, IEC 60601-1-2

FDA

510(k) market clearance

MDD 93/42/EEC

CE marked

**Associations &
Institutes**

ATS/ERS 2005, NIOSH/ OSHA, SSA Disability

Languages

English, French, German, Spanish, Italian, Brazilian-portuguese, Dutch, Russian, Vietnamese, Turkish

Technical

Printing options

direct to printer or over network

Data management

EasyWare Pro

Interface

HL7, XML, GDT

No. of tests

> 10'000 tests

Age range

Spirometry > 4 years

Device classification

Type BF applied part

Operating conditions

Temp 0 - 40 °C/32 - 104 °F
Rel. Humidity 5 - 95 %
Atmosph. Pressure 500 - 1060 hPA

Requirements PC/ Laptop

Hard disk capacity

Installation/ system 1 GB
Data up to 4 GB

RAM

2 GB

Operating system

Windows XP SP3, Windows Vista, Windows 7, Windows 8 and 8.1 (32 and 64 bit)



The original ultrasonic flow measurement is highly accurate in all flow ranges, independent of gas composition, pressure, temperature and humidity and does not require calibration during its life-time. The sensor is never in direct contact with the patient's flow. n d d TrueFlow is a hygienic and resistance-free solution.

Parameters

FVC	ATI, BEV, EOTV, FEF10, FEF25, FEF2575, FEF2575_6, FEF40, FEF50, FEF50/FVC, FEF50/VCmax, FEF60, FEF75, FEF75-85, FEF80, FET, FET25-75, FEV.25, FEV.5, FEV.5/FVC, FEV.75, FEV.75/FEV6, FEV.75/FVC, FEV.75/VCmax, FEV1, FEV1/FEV6, FEV1/FVC, FEV1/FVC6, FEV1/VCmax, FEV1/VCext, FEV3/FVC, FEV3/VCmax, FEV3, FEV6, FVC, FVC6, MEF20, MEF25, MEF40, MEF50, MEF60, MEF75, MEF90, MMEF, MTC1, MTC2, MTC3, MTCR, PEF, PEFT, to, VCext, VCmax
FVL	ATI, BEV, CVI, E50/150, EOTV, FEF10, FEF25, FEF2575, FEF2575_6, FEF40, FEF50, FEF50/FVC, FEF50/VCmax, FEF60, FEF75, FEF75-85, FEF80, FET, FET25-75, FEV.25, FEV.5, FEV.5/FVC, FEV.75, FEV.75/FEV6, FEV.75/FVC, FEV.75/VCmax, FEV1, FEV1/FEV6, FEV1/FIV1, FEV1/FVC, FEV1/VCmax, FEV1/VCext, FEV3/FVC, FEV3/VCmax, FEV3, FEV6, FIF25, FIF50, FIF50/FEF50, FIF75, FIV.25, FIV.5, FIV1, FIVC, FVC, MEF20, MEF25, MEF40, MEF50, MEF60, MEF75, MEF90, MIF25, MIF50, MIF75, MMEF, MTC1, MTC2, MTC3, MTCR, PEF, PEFT, PIF, to, VCext, VCmax
SVC	ERV, IC, IRV, Rf, VC, VCex, VCext, VCin, VCmax, VT
MVV	MVV, MVV6, MVVtime, VT

Predicted normal values Spirometry

GLI	Stanojevic 2009, Quanjer 2012
North America	NHANES III (Hankinson) 1999, Knudson 1983, Knudson 1976, Crapo 1981, Morris 1971 & 1976, Hsu 1979, Dockery (Harvard) 1993, Polgar 1971, Gutierrez (Canada) 2004, Eigen 2003
Latin America	Pereira 1992, Perreira 2006 & 2008, Pérez-Padilla (PLATINO) 2006, Pérez-Padilla (Mexico) 2001, Pérez-Padilla (Mexico, Pediatrics) 2003, Chile 2010, Chile (Pediatrics) 1997
Europe	ERS (ECCS, EGKS, Quanjer) 1993, Zapletal 1977, Zapletal 2003, Rosenthal 1993, Austria 1988, Austria 1994, Sapal-dia 1996, Roca (Spain, SEPAR) 1982, Garcia-Rio (SEPAR) 2013, Vilozni 2005, Falaschetti 2004, Klement (Russia) 1988
Europe Scandinavia	Hedenström 1985 & 1986, Gulsvik (Norway) 1985, Berglund Birath (Sweden) 1963, Langhammer (Norway) 2001, Finnish 1982 (1998), Nystad 2004
Australia	Hibbert 1989, Gore Crockett 1997
Africa, Asia	Ethiopia 1985, JRS 2001

Flow/Volume Sensor

Type	Ultrasonic transit time
Range	± 16 l/s
Resolution	4 ml/s
Accuracy	± 2% or 0.02 l/s
Volume	± 2% or 0.050 l
Flow	± 2% or 0.020 l/s
PEF	± 5% or 5 l/min
MVV	± 2% or 0.050 l
Resistance	~ 0.3 cm H ₂ O/l/s
Sample rate	400 Hz